

### Features:





- 4 points contact
- Antu-fishhooking contact design
- Finished: Tin-plated ( Lead free )
- Wire range: #18 ~ #24 AWG
- Thichness: 0.25mm
- Q'ty: 5000 PCS / Reel


### Specification:

- Current rating: 7A
- Contact resistance: Initial 10mΩ Max.

### Ordering Information

Part No.	Material	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
T5081-TBE00000R	Brass	#18 ~ #24	2.45	2.4	4.0	3.9
T5081-TPE00000R	Phosphor bronze					

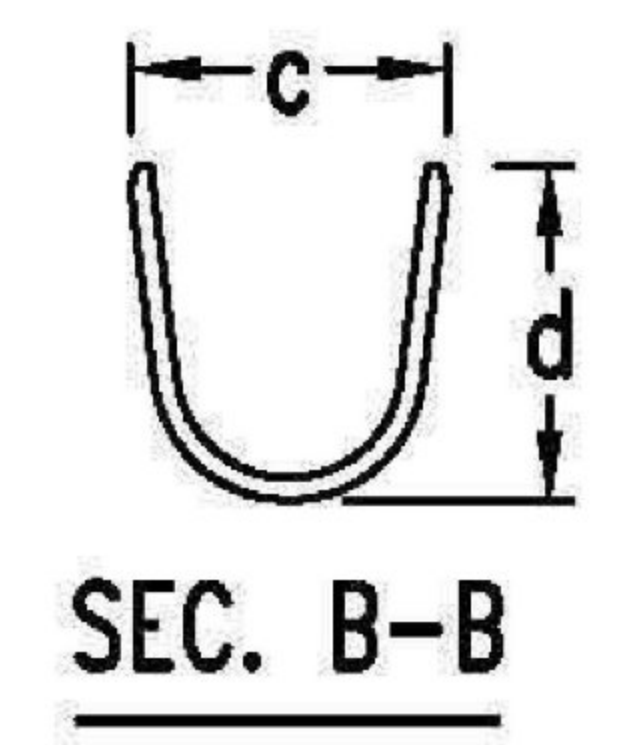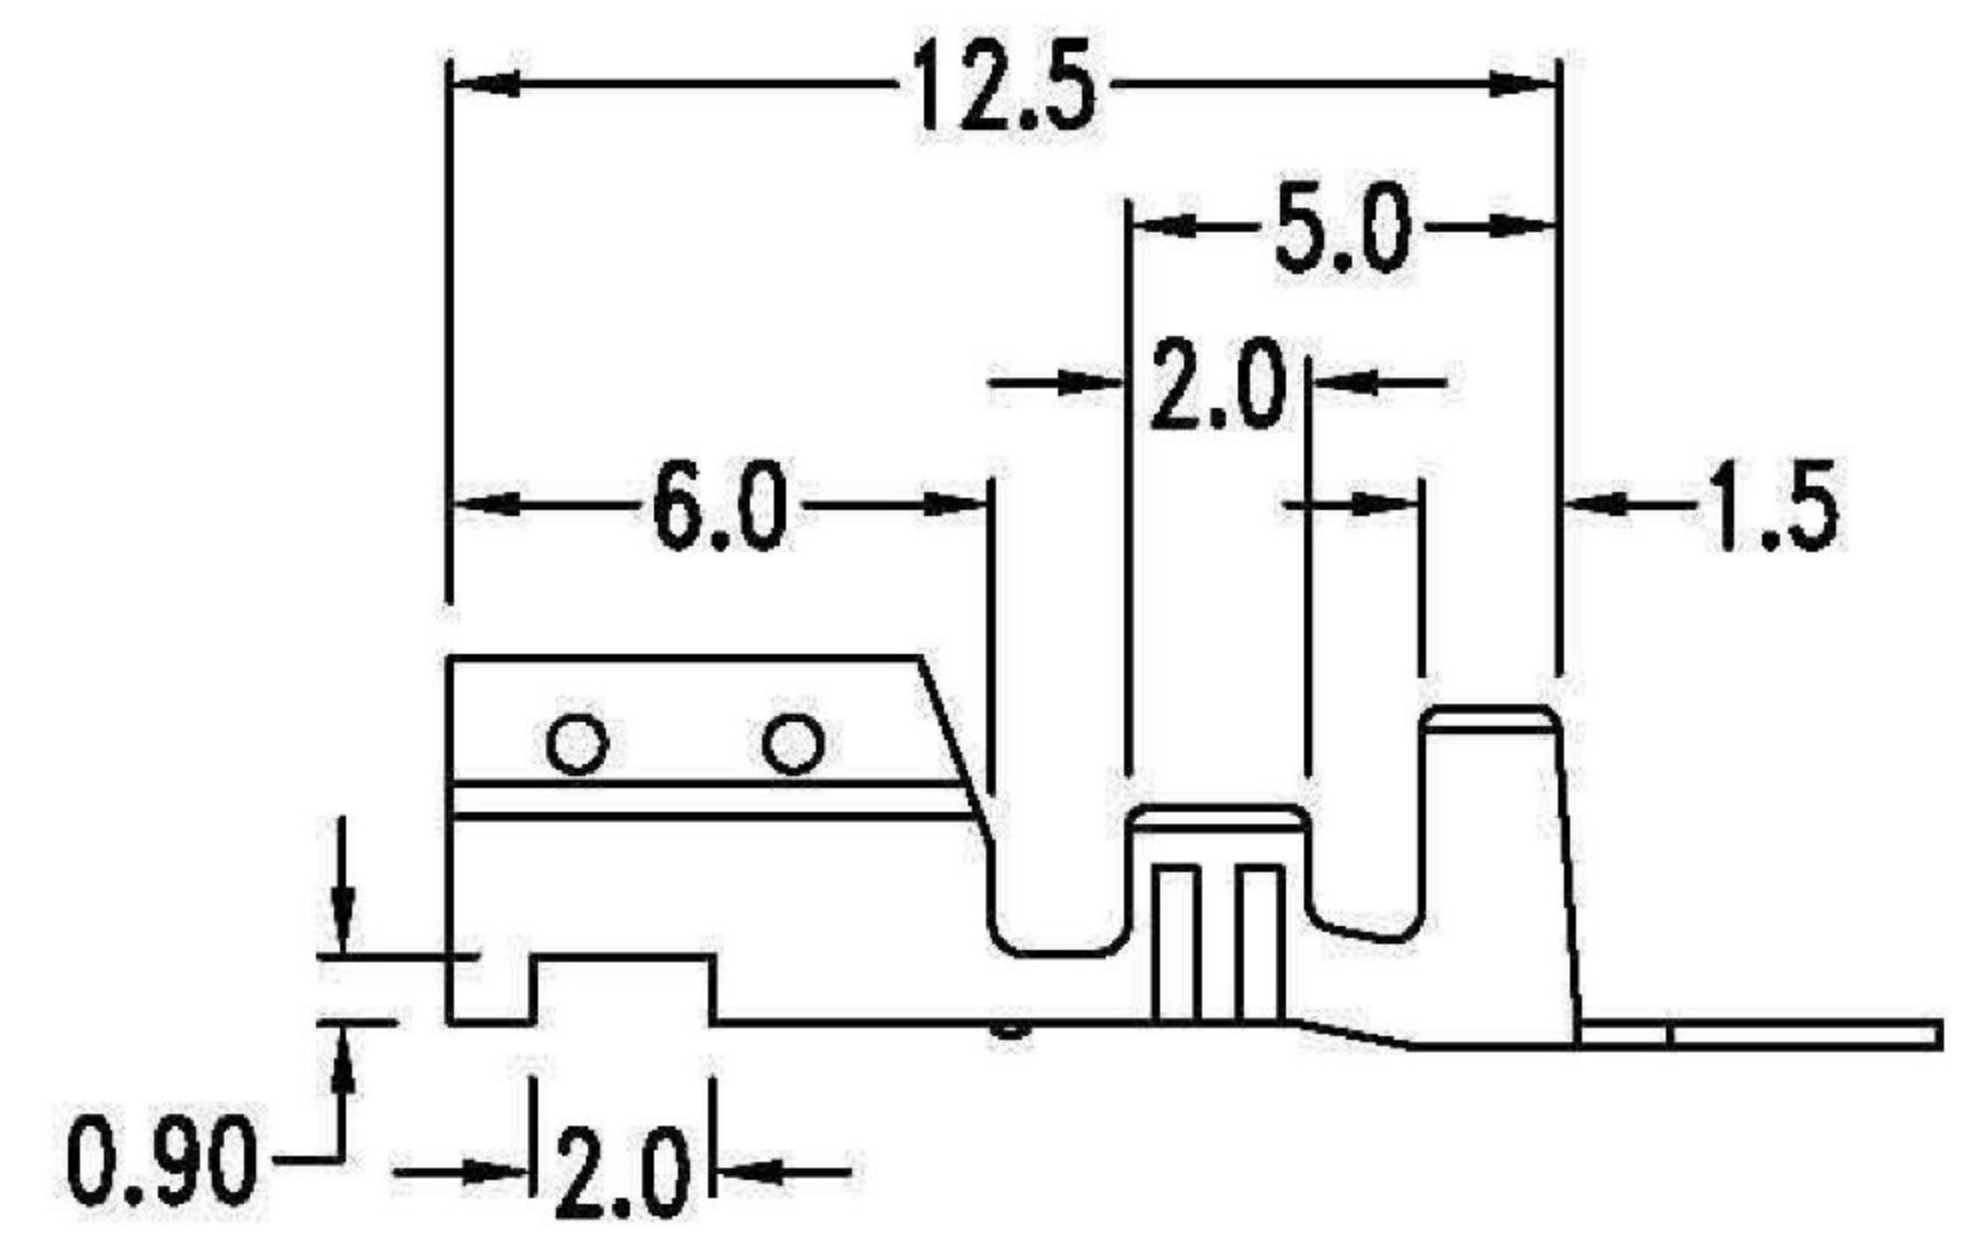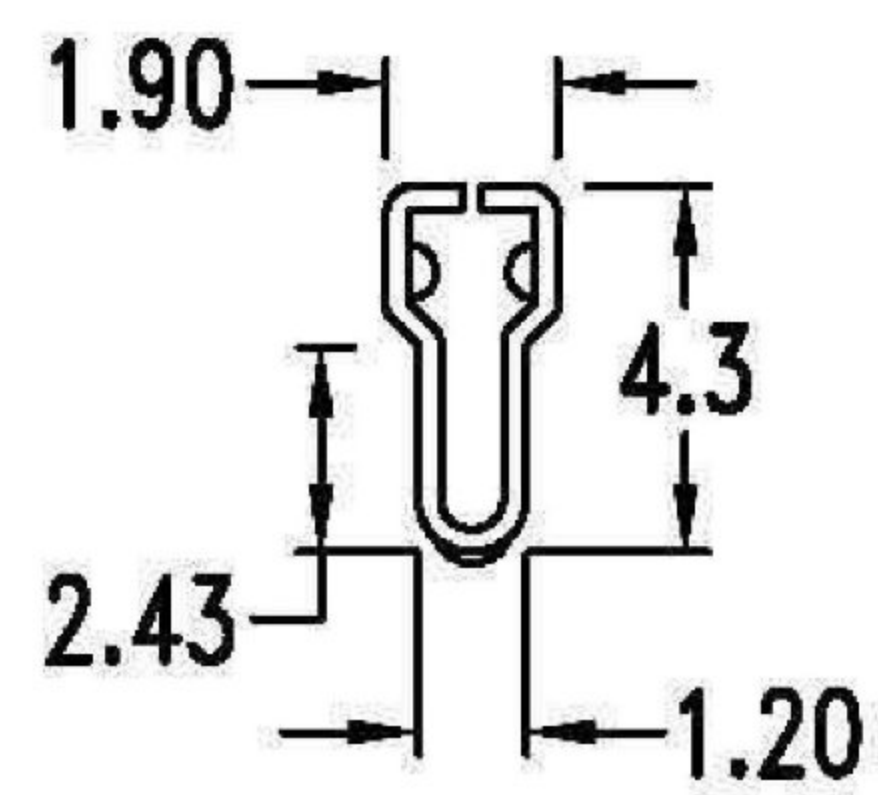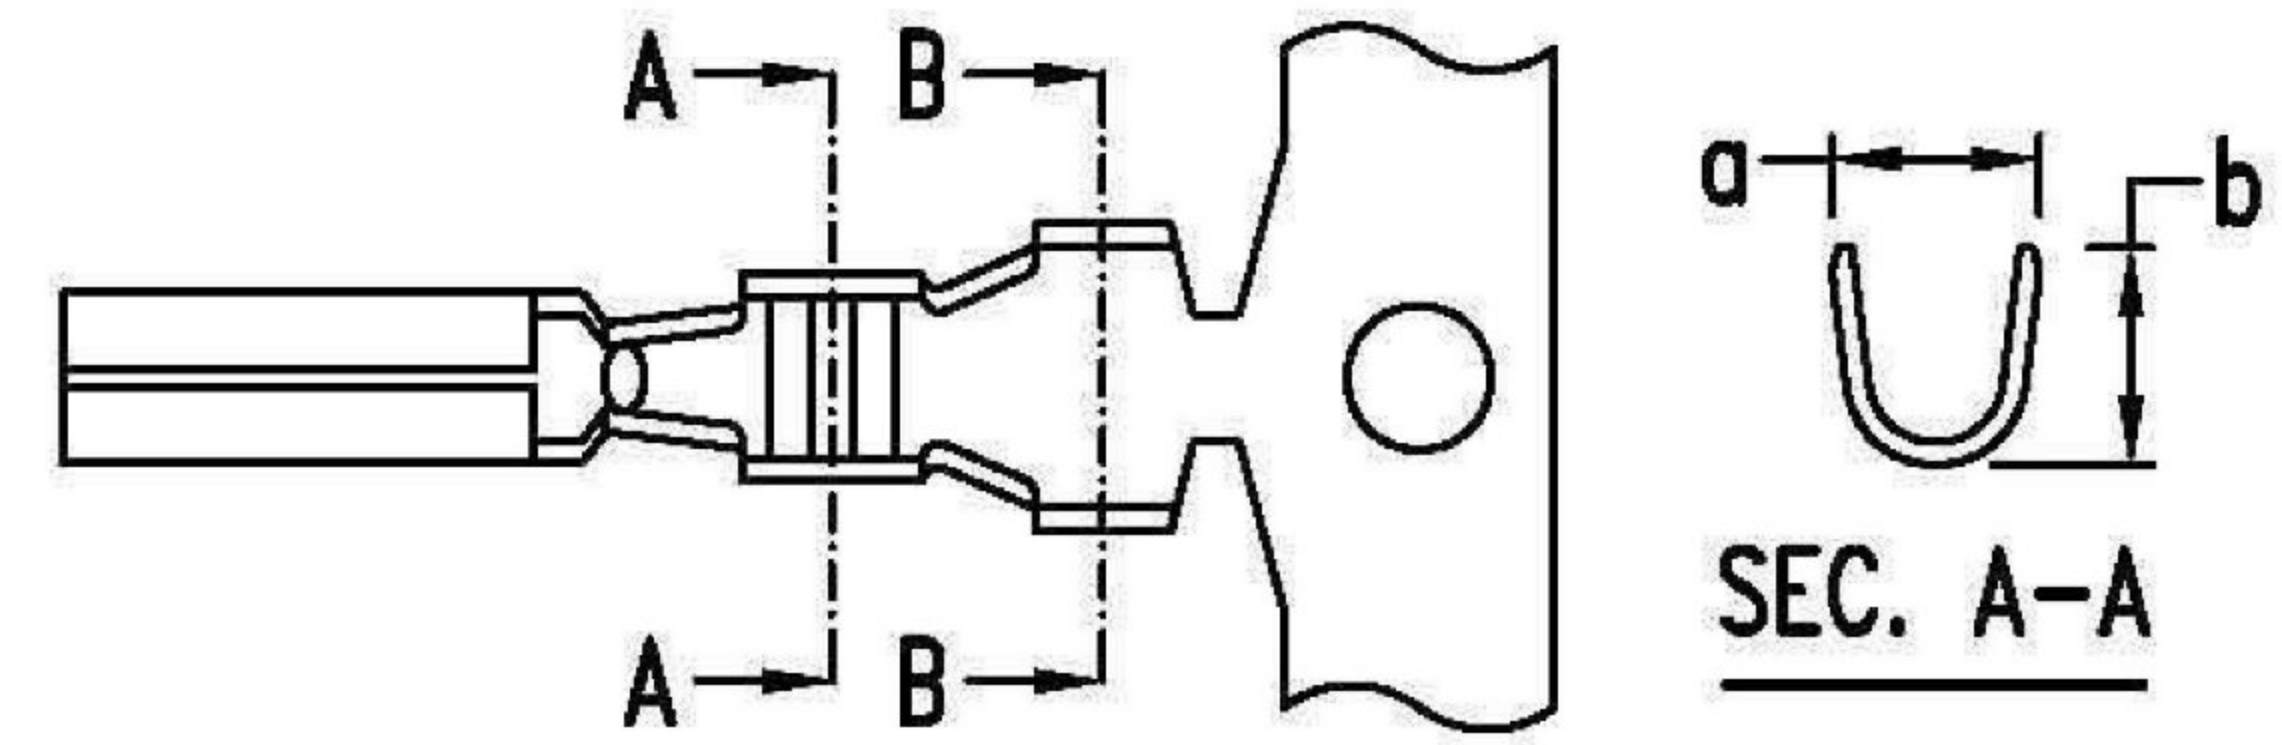

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	 TOLERANCE 容許公差 .000 ± 0.08 .00 ± 0.25 .0 ± 0.40	PART NAME 品名 3.96mm/5.08mm TERMINAL TIN PLATING SUITABLE AWG18~24 ROHS	
DWG. 製圖 ABBY	SCALE 比例 參考 UNIT 單位 MM	PART NO. 料號 T5081-TXE00000R	
DATE 制表日 2017/07/18	PAGE 張數 1 OF 1	REV. 版次 A	