
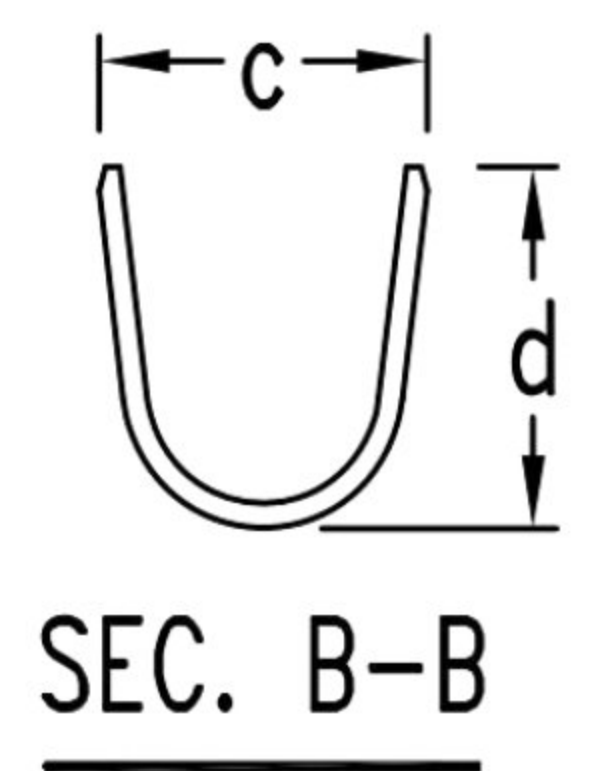
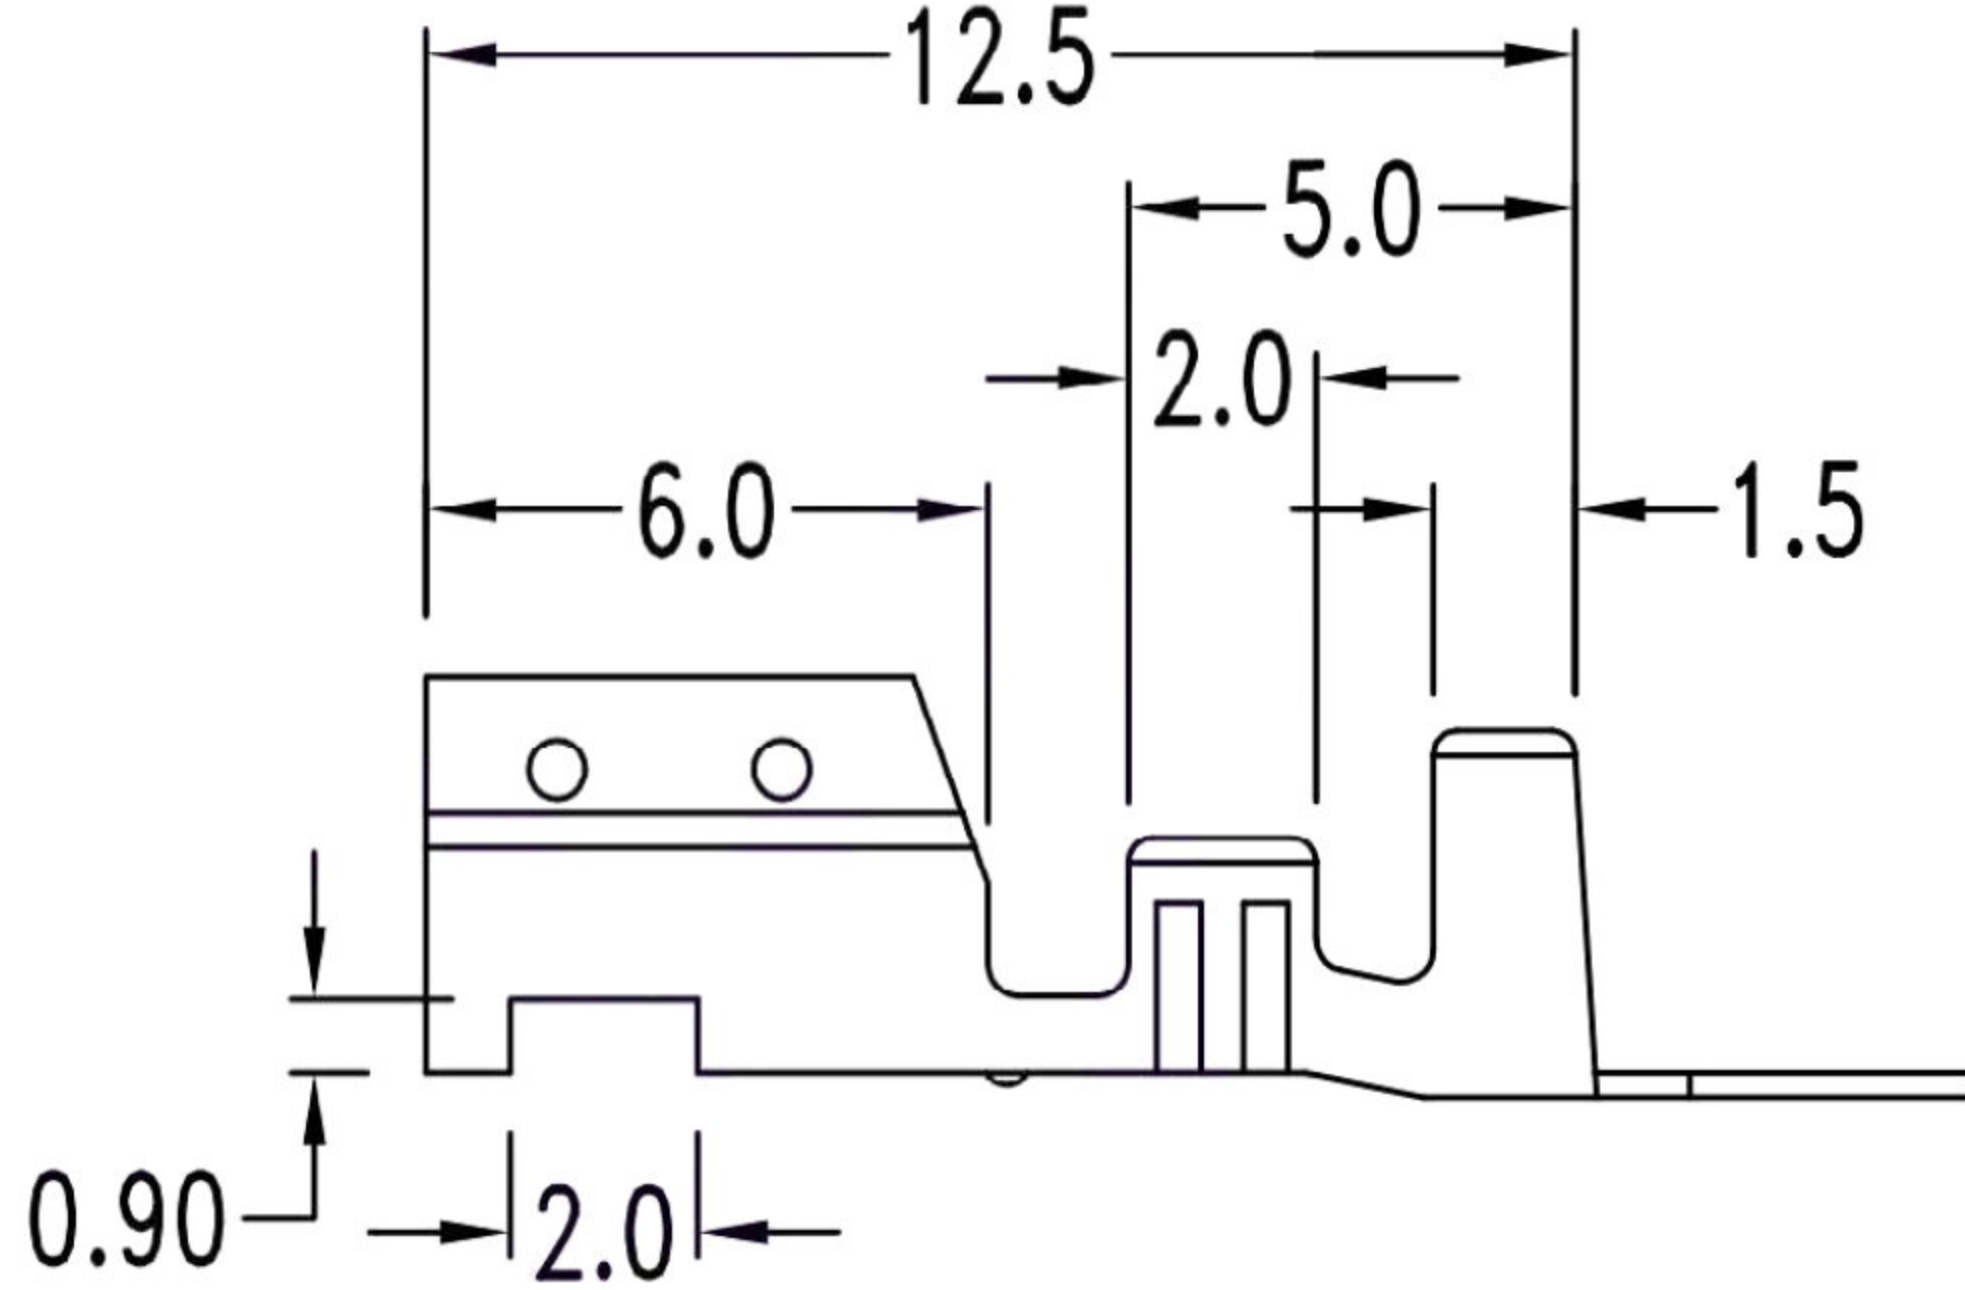
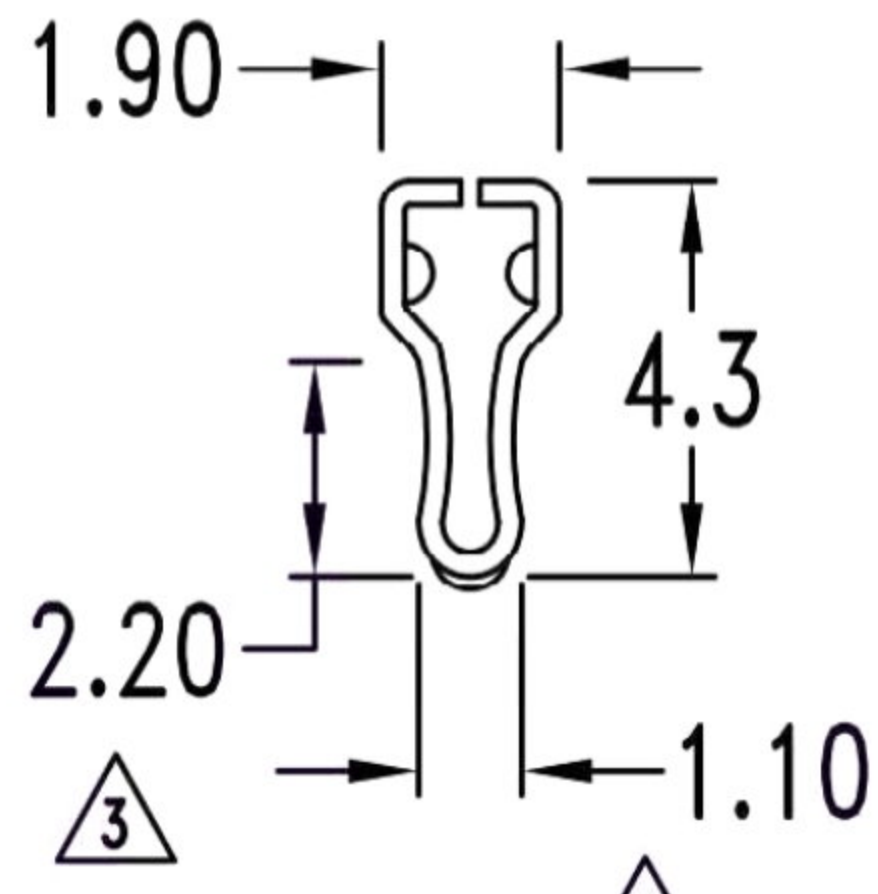
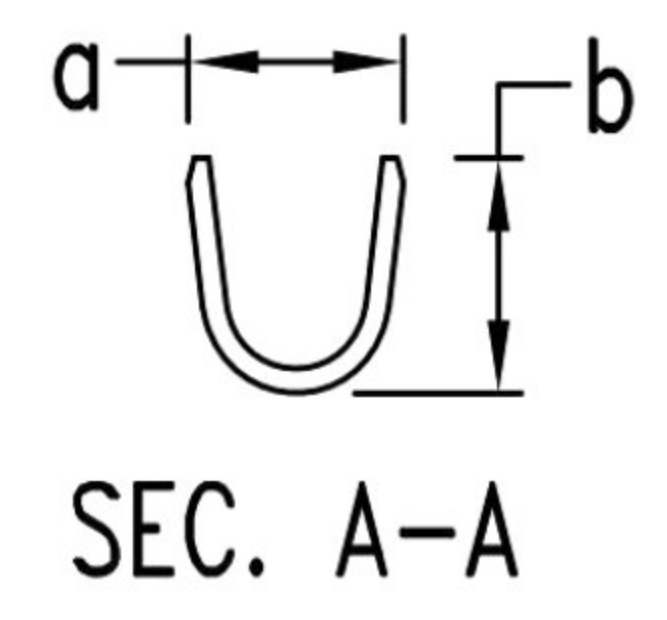


Features:

- 4 points contact
- Antu-fishhooking contact design
- Finished: Tin-plated
- ⚠ • Wire range: #18 ~ #22 AWG
- Thickness: 0.25mm
- Q'ty: 5000 PCS / Reel

Specification:

- Current rating: 7A
- Contact resistance: Initial 10mΩ Max.

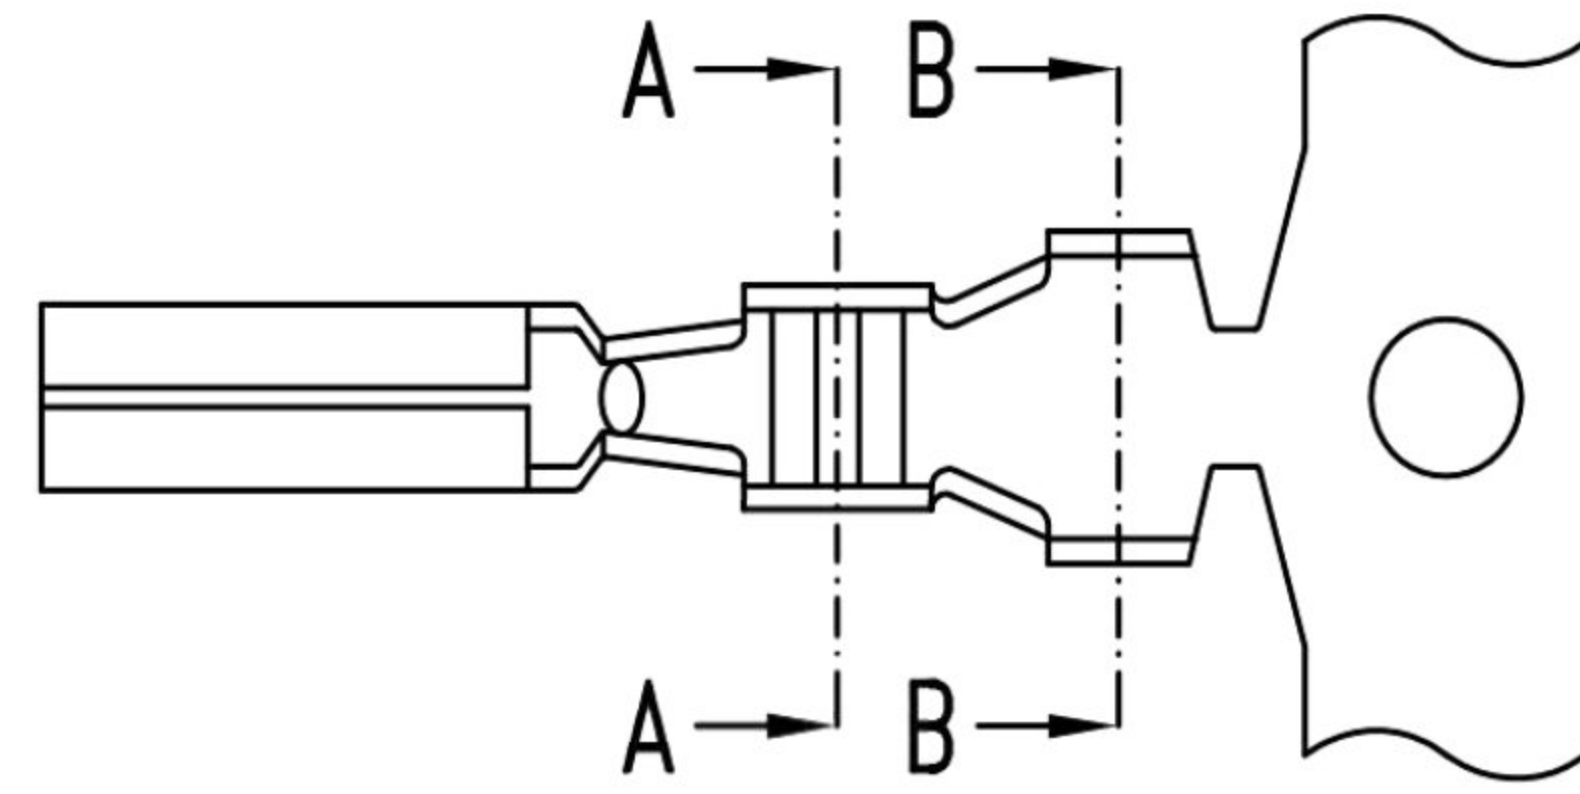

Ordering Information

Part No.	Material	Wire range	Dim. a	Dim. b	Dim. c	Dim. d
T5081-TBD00000R	Brass	#18 ~ #22	2.3	2.4	3.5	3.6
T5081-TPD00000R	Phosphor bronze					
T5081-TBA800000R	Brass	#18 ⚠	2.45	2.4	4.0	3.9
T5081-TPA800000R	Phosphor bronze					

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	TOLERANCE 容許公差 .000 ± 0.08 .00 ± 0.25 .0 ± 0.40	PART NAME 品名 3.96mm/5.08mm TERMINAL TIN PLATING ROHS
DWG. 製圖 ABBY		
DATE 制表日 2014/08/05	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	REV. 版次 A PART NO. 料號 T5081-TXX00000R