

**Features:**

- 14 ~ 24 circuits available
- Material: PA66 UL 94-V2 or 94-V0

**Specification:**

- Voltage rating: 600V AC, DC
- Contact resistance: 10 mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C


Current rating & wire size:

Wire Size	Rated Voltage	Circuits
AWG		14 ~ 24
#18	250V	6A
#20		5A
#22		4A
#24		3A

**Ordering Information and Dimensions:**

PART NO.	Dimensions	
	A	B
14P	24.84	30.56
16P	28.98	34.70
18P	33.12	38.84
20P	37.26	42.98
22P	41.40	47.12
24P	45.54	51.26

APPD. 核准 DWG. 製圖 DATE 制表日 2017/9/11	RoHS Compliant Helen	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3°	PART NAME 品名 4.14mm WAFER (2X7P~2X12P) 180° WITH LOCATING PEG WHITE COLOR NYLON 66 UL94V-0 ROHS
HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.			PART NO. 料號 W1110-(14~24)PDSYW1R

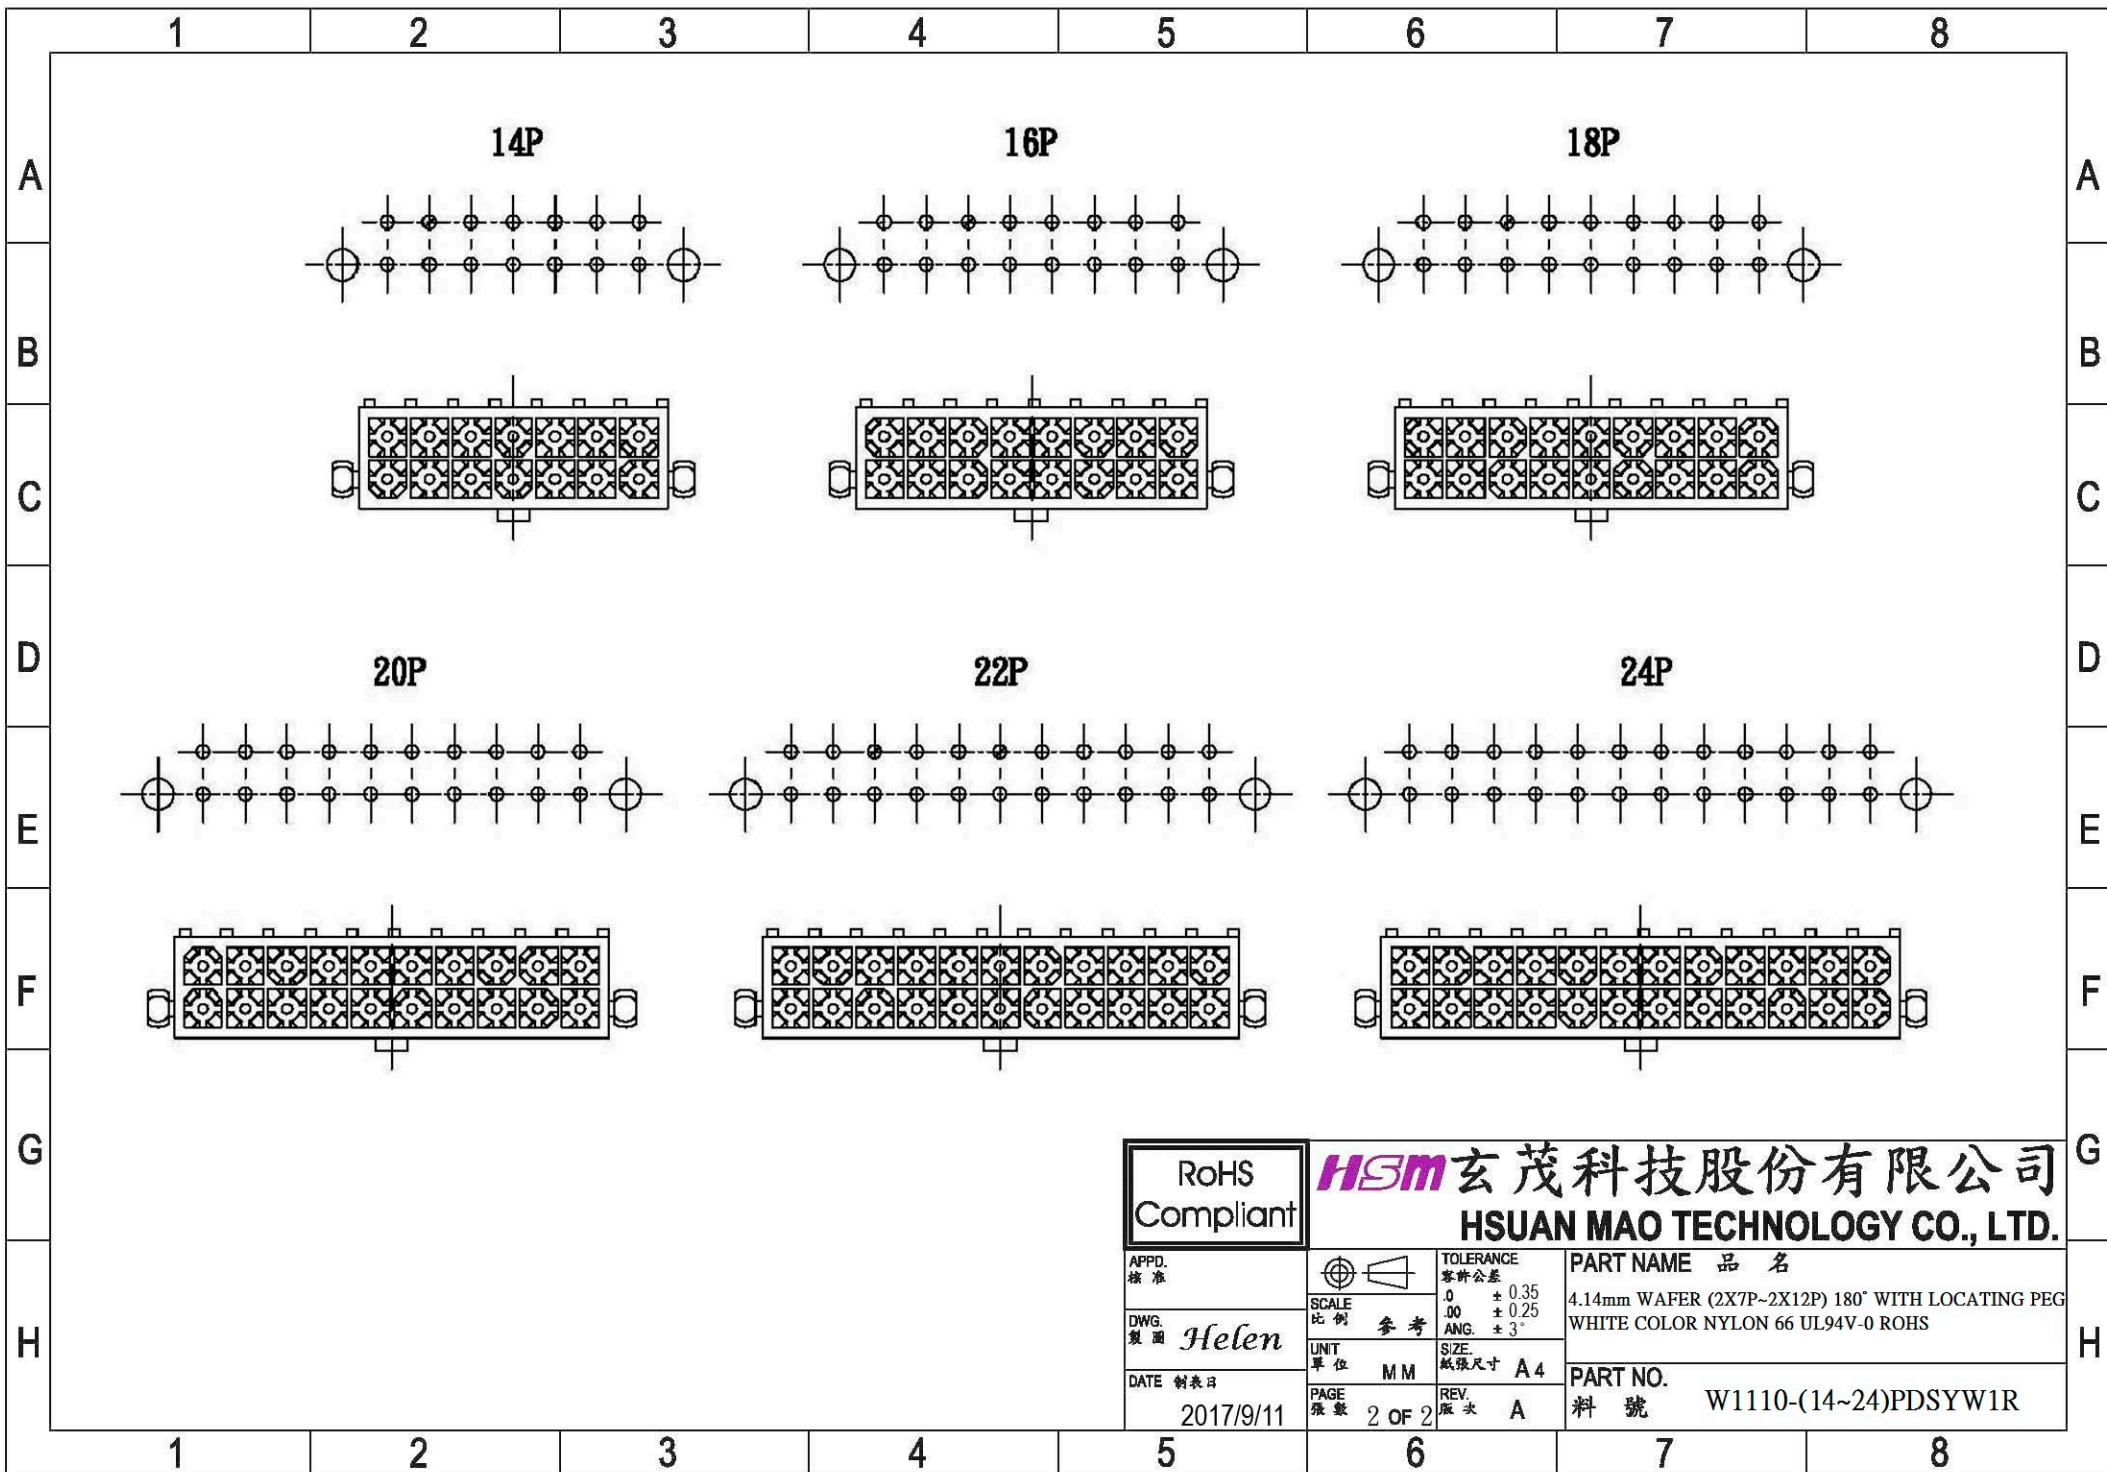

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.  
核准  
DWG.  
製圖  
DATE  
制表日

SCALE  
比例  
UNIT  
單位  
PAGE  
張數

TOLERANCE  
容許公差  
SIZE.  
紙張尺寸  
REV.  
版本

Helen

2017/9/11

參考  
M M  
2 OF 2

A 4  
A

PART NAME 品名  
4.14mm WAFER (2X7P~2X12P) 180° WITH LOCATING PEG  
WHITE COLOR NYLON 66 UL94V-0 ROHS

PART NO.  
料號 W1110-(14~24)PDSYW1R