

NOTES:

SPECIFICATION



- 1.Current : 2.5A max.
- 2.Voltage: 250V AC max.
- 3.Insulation Resistance: 500K Megohms Min.
- 4.Contact Resistance: 20 Milliohms Max.
- 5.Dielectric Withstanding Voltage: 1500V AC
- 6.Temperature: 0°C to +75°

MATERIAL

- 1.Contact: Brass
- 2.Housing:Nylon,UL 94V-2
- 3.PLATING :

UNDERPLATING:NICKEL PLATING FOR ALL 50u" MIN.

SOLDER TAIL PLATING:TIN-LEAD 90/10 PLATING 100u"~200u".

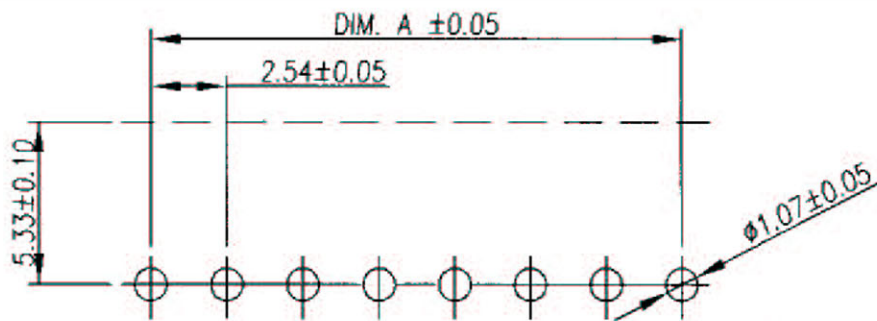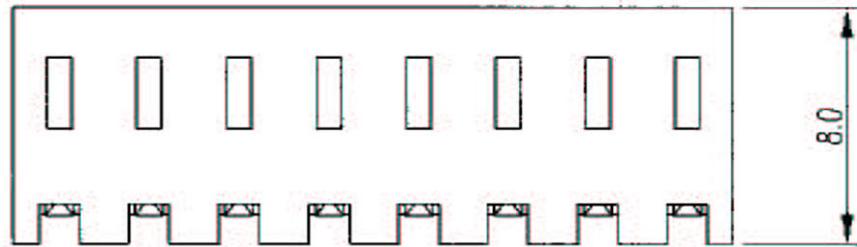


P.C.B LAYOUT

| NO. OF CONTACT | Dimension | | NO. OF CONTACT | Dimension | | NO. OF CONTACT | Dimension | | NO. OF CONTACT | Dimension | |
|----------------|-----------|-------|----------------|-----------|-------|----------------|-----------|-------|----------------|-----------|-------|
| | A | B | | A | B | | A | B | | A | B |
| 02 | 2.54 | 5.10 | 09 | 20.32 | 22.88 | 16 | 38.10 | 40.66 | 23 | 55.88 | 58.44 |
| 03 | 5.08 | 7.64 | 10 | 22.86 | 25.42 | 17 | 40.64 | 43.20 | 24 | 58.42 | 60.98 |
| 04 | 7.62 | 10.18 | 11 | 25.40 | 27.96 | 18 | 43.18 | 45.74 | 25 | 60.96 | 63.52 |
| 05 | 10.16 | 12.72 | 12 | 27.94 | 30.50 | 19 | 45.72 | 48.28 | 26 | 63.50 | 66.06 |
| 06 | 12.70 | 15.26 | 13 | 30.48 | 33.04 | 20 | 48.26 | 50.82 | 27 | 66.04 | 68.60 |
| 07 | 15.24 | 17.80 | 14 | 33.02 | 35.58 | 21 | 50.80 | 53.36 | 28 | 68.58 | 71.14 |
| 08 | 17.78 | 20.34 | 15 | 35.56 | 38.12 | 22 | 53.34 | 55.90 | 29 | 71.12 | 73.68 |

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖

HELEN

SCALE
比例

0 ± 0.35
.00 ± 0.10
ANG ±

2.54mm WAFER 1X8P RIGHT ANGLE W/O
LOCKING RIBS WHITE INSULATOR ROHS
LOW-LEAD

UNIT
單位

M M

SIZE.
紙張尺寸

A 4

PART NO.

DATE 制表日

2008/10/20

PAGE
張數

1 OF 1

料號

W1254-XXPANXWOR