
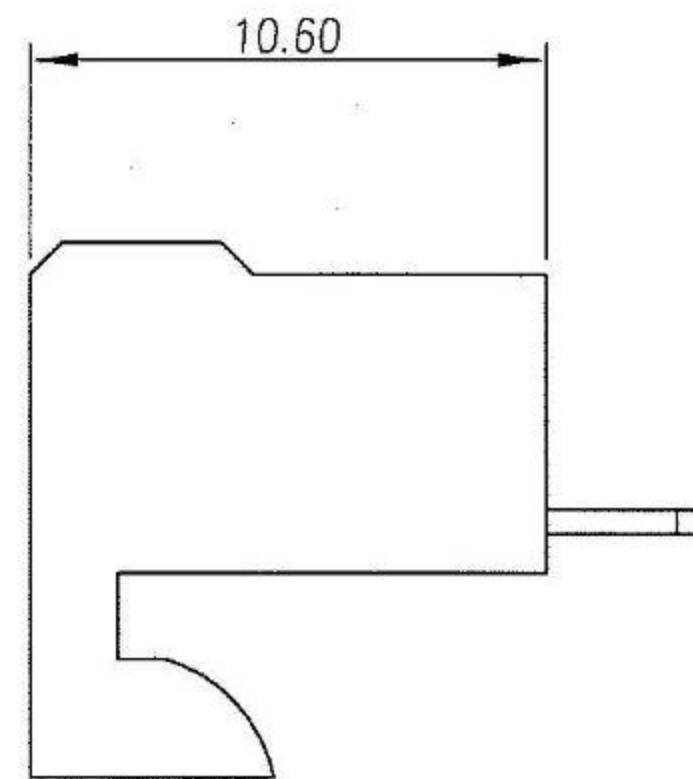


1 2 3 4 5 6 7 8


A

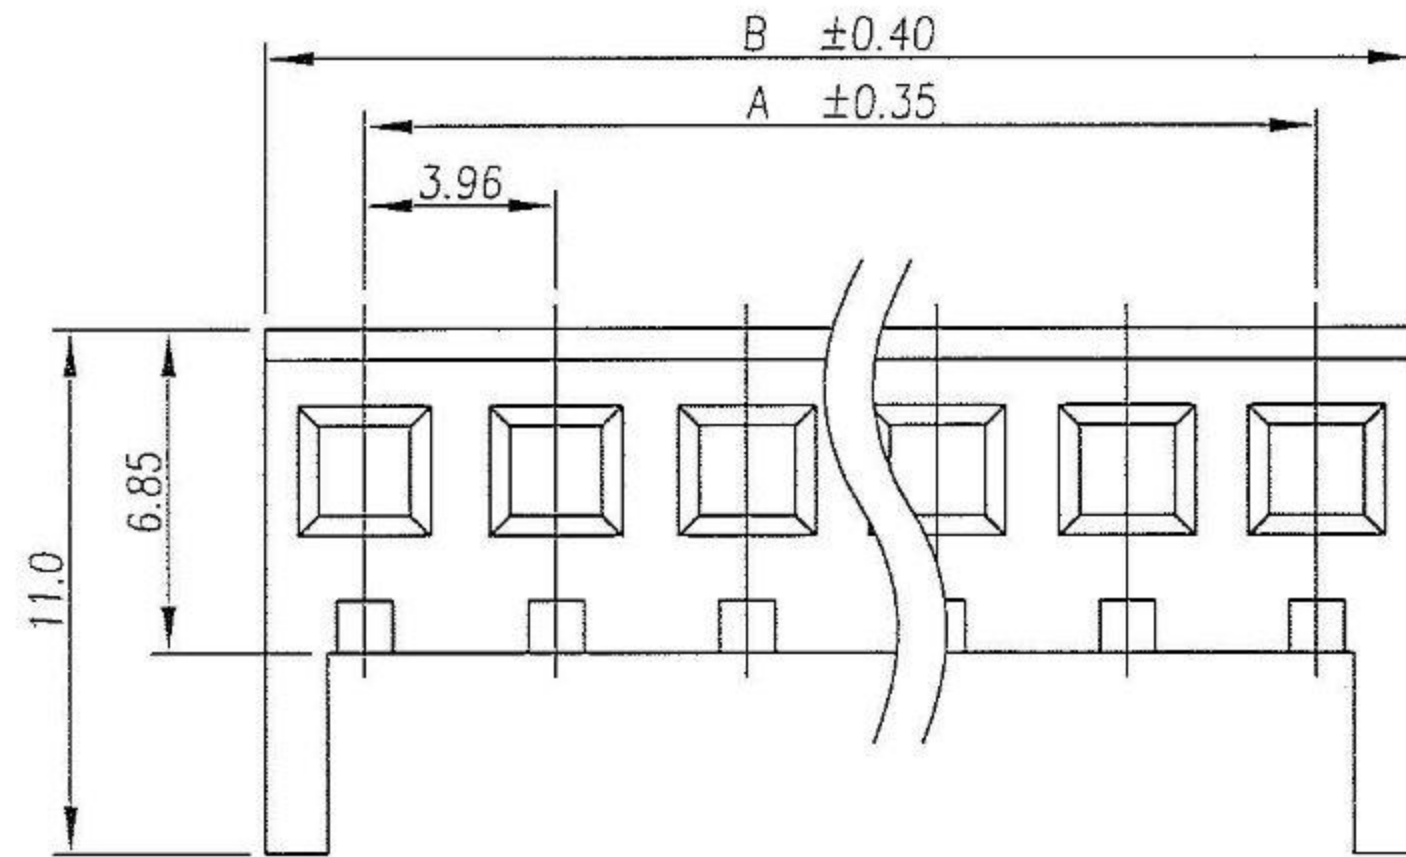

B

C


D

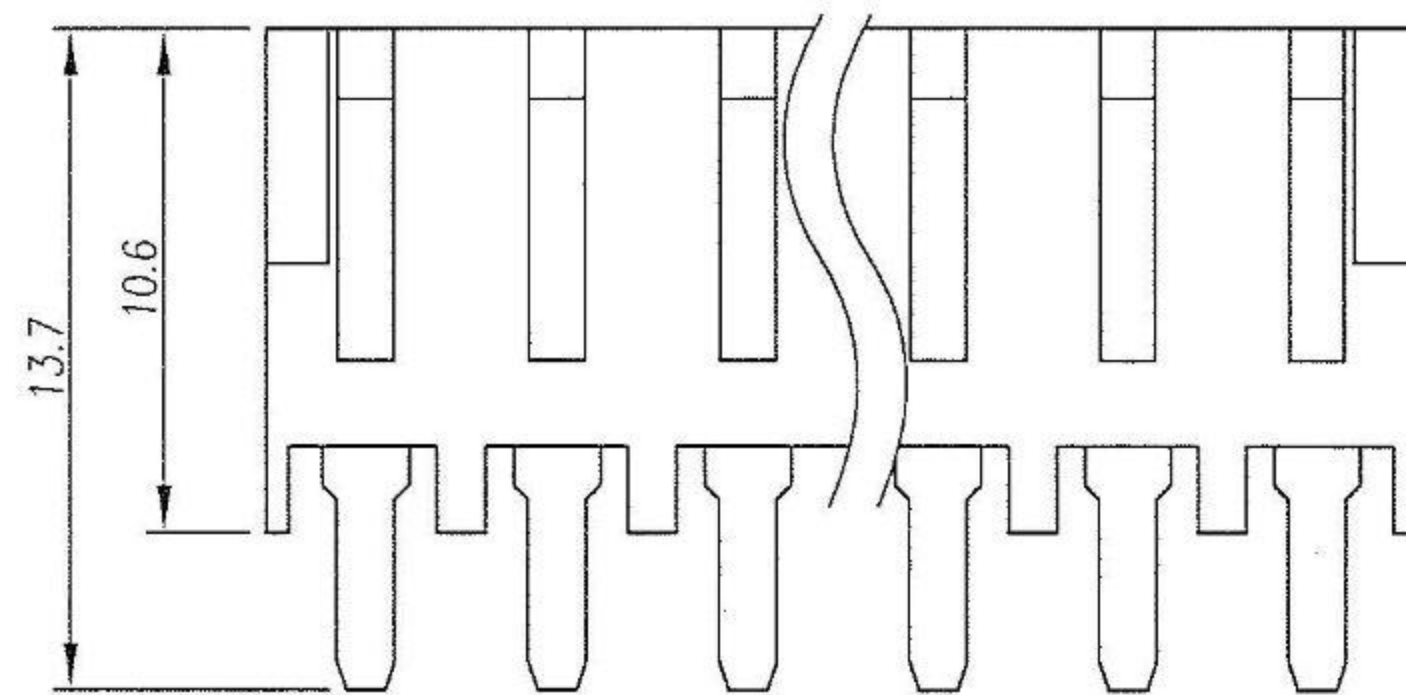

E

F

G

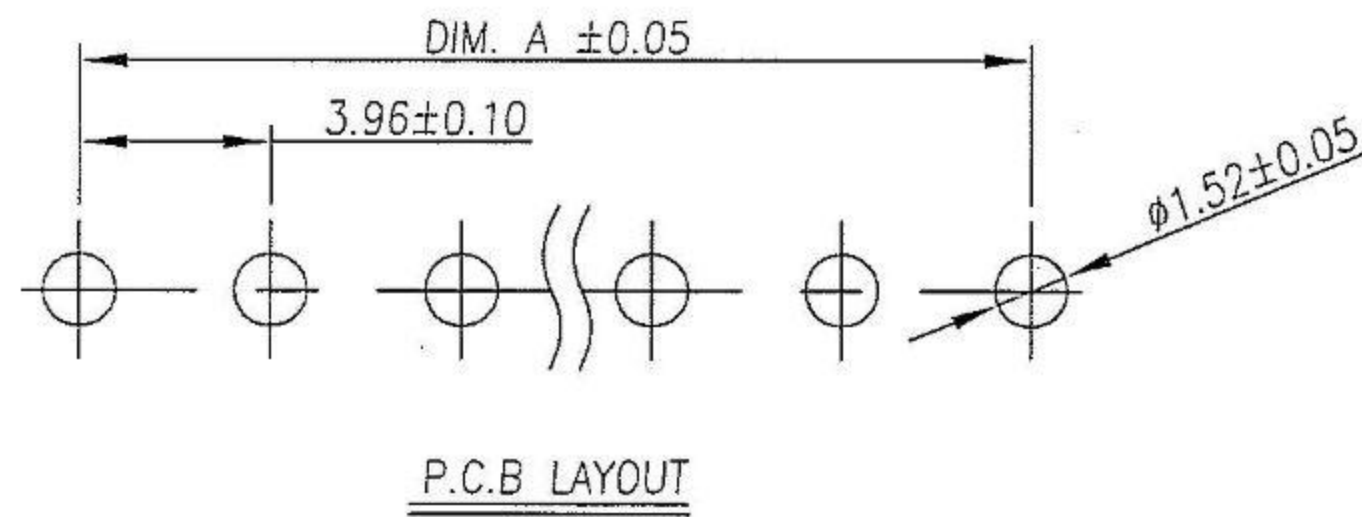

H

1 2 3 4 5 6 7 8

NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension	
	A	B		A	B
02	3.96	8.06	10	35.64	39.74
03	7.92	12.02	11	39.60	43.70
04	11.88	15.98	12	43.56	47.66
05	15.84	19.94	13	47.52	51.62
06	19.80	23.90	14	51.48	55.58
07	23.76	27.86	15	55.44	59.54
08	27.72	31.82	16	59.40	63.50
09	31.68	35.78			

A

B

C

D

E

F

G

H

NOTES:

SPECIFICATION

- 1.Current : 5A max.
- 2.Voltage: 250V AC max.
- 3.Insulation Resistance: 50K Megohms Min.
- 4.Contact Resistance: 6 Milliohms Max.
- 5.Dielectric Withstanding Voltage: 1500V AC
- 6.Temperature: 0°C to +75°

MATERIAL

- 1.Contact: Brass
- 2.Housing:Nylon,UL 94V-2
- 3.Plated:Underplating Nickel Plating for All Min 50u"
Solder Tail Tin plating 90/10 Plating 100u"~200u"

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE UNLESS OTHERWISE SPECIFIED .X±0.35 X*± .XX±0.10 .X*± .XXX± .XX*±	PART NAME 品名 3.96mm WAFER 1X??P STRAIGHT WITH LOCKING RIBS TIN PLATED WHITE INSULATOR ROHS LOW-LEAD
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 W1396-XXPCYTW0R
DATE 制表日 2011/05/04	PAGE 張數 1 OF 1	REV. 版本 A	