


■ SPECIFICATION

- Voltage rating: 100V AC, DC
- Current Rating: 2A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 40mΩ max
- Insulation resistance: 500MΩ min
- Temperature range: -25° C ~ +85° C

■ WAFER

- Material: PA9T UL94V-0
- Contact area, Brass Tin-plated
- Pin: Phosphor Bronze

CKL	DimA	DimB	DimC
02	1.5	7.50	3.75
03	3.0	9.00	5.25
04	4.5	10.50	6.75
05	6.0	12.00	8.25
06	7.5	13.50	9.75
07	9.0	15.00	11.25
08	10.5	16.50	12.75
09	12.0	18.00	14.25
10	13.5	19.50	15.75
11	15.0	21.00	17.25
12	16.5	22.50	18.75
13	18.0	24.00	20.25
14	19.5	25.50	21.75
15	21.0	27.00	23.25
16	22.5	28.50	24.75

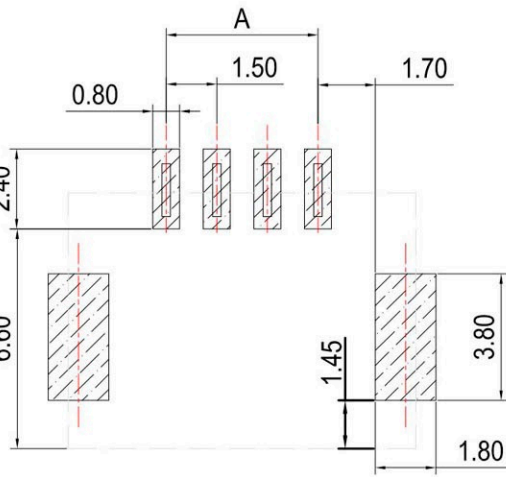

Recommended P. C. B Layout
General Tolerance ±0.05

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准</p>	<p>SCALE 比例 参考</p>	<p>TOLERANCE 容許公差</p> <p>0 ± 0.35 .00 ± 0.25 ANG. ± 5°</p>	<p>PART NAME 品名</p> <p>1.50mm WAFER SMT 90° TYPE 1X??PIN TIN PLATING MATERIAL:PA9T UL94V-0 WHITE COLOR REEL PACKING ROHS</p>
<p>DWG. 製圖 Helen</p>	<p>UNIT 單位 MM</p>	<p>SIZE 紙張尺寸 A4</p>	<p>PART NO. 料號 W1503-XXPBBTRWR</p>
<p>DATE 制表日 2021/12/24</p>	<p>PAGE 張數 1 OF 1</p>	<p>REV. 版本 A</p>	