

**Features:**

- 4 ~ 24 circuits available
- Plastic material: LCP
- Tin-plated brass
- .0246"(0.625mm) square pin
- Recommended PCB thickness: .062"(1.57mm)

**Specification:**


- Voltage rating: 250V AC(RMS) or DC
- Current rating: 5A AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

**Dimensional Information ( mm )**

Circuits	N
Dim. A	3 x ( N / 2 - 1 )
Dim. B	A + 10
Dim. C	A - 4.32

&& N = 4 ~ 24

PCB Layout: Component side

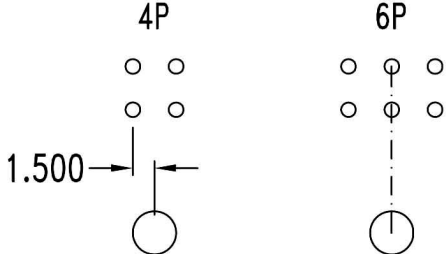

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.05 ( mm ) .00 ± 0.15 ( mm ) .0 ± 0.25 ( mm )	PART NAME 品名 Micro-Fit 3.0mm BMI Type 2XXXP RIGHT ANGLE TYPE WITH RETENTION PEG WITH BRACKET TIN PLATING BLACK COLOR MATERIAL:LCP ROHS
DWG. 製圖 Betty	SCALE 比例 參考	SIZE 紙張尺寸 A 4	PART NO. 料號 W4231-XXPRYTBO8
DATE 制表日 2013/10/29	UNIT 單位 M M PAGE 張數 1 OF 1	REV. 版次 A	