

Features:


- 2 ~ 10, circuits available
- Pin Material: Tin-plated phosphor bronze

Specification:


- Current rating: 13A (2~4P), 11A (6~15P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

Ordering Information

Part No.	Insulation material	Feature	Color
W6350-XXPXSYPW0R	UL 94V-2 nylon 66	With Polarizing	Nature
W6350-XXPXSYPW0R		Without Polarizing	
W6350-XXPXSYPW1R	UL 94V-0 nylon 66	With Polarizing	White
W6350-XXPXSYPW1R		Without Polarizing	

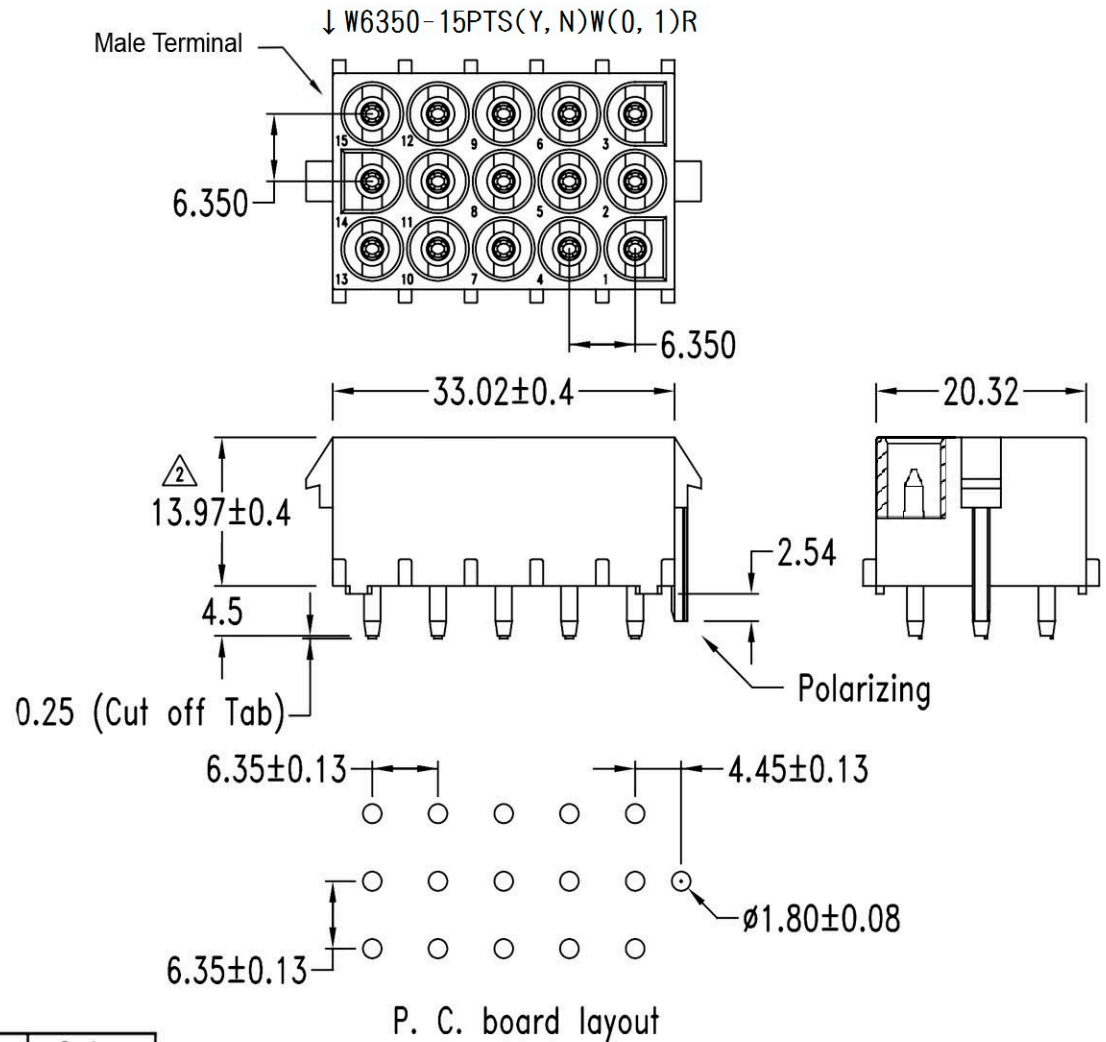

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2017/9/12	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 2 OF 1
PART NAME 品名 6.35mm WAFER STRAIGHT(MALE) 2X??P AND 3X??P WHITE COLOR ROHS		PART NO. 料號 W6350-XXP(D,T)SXWXR

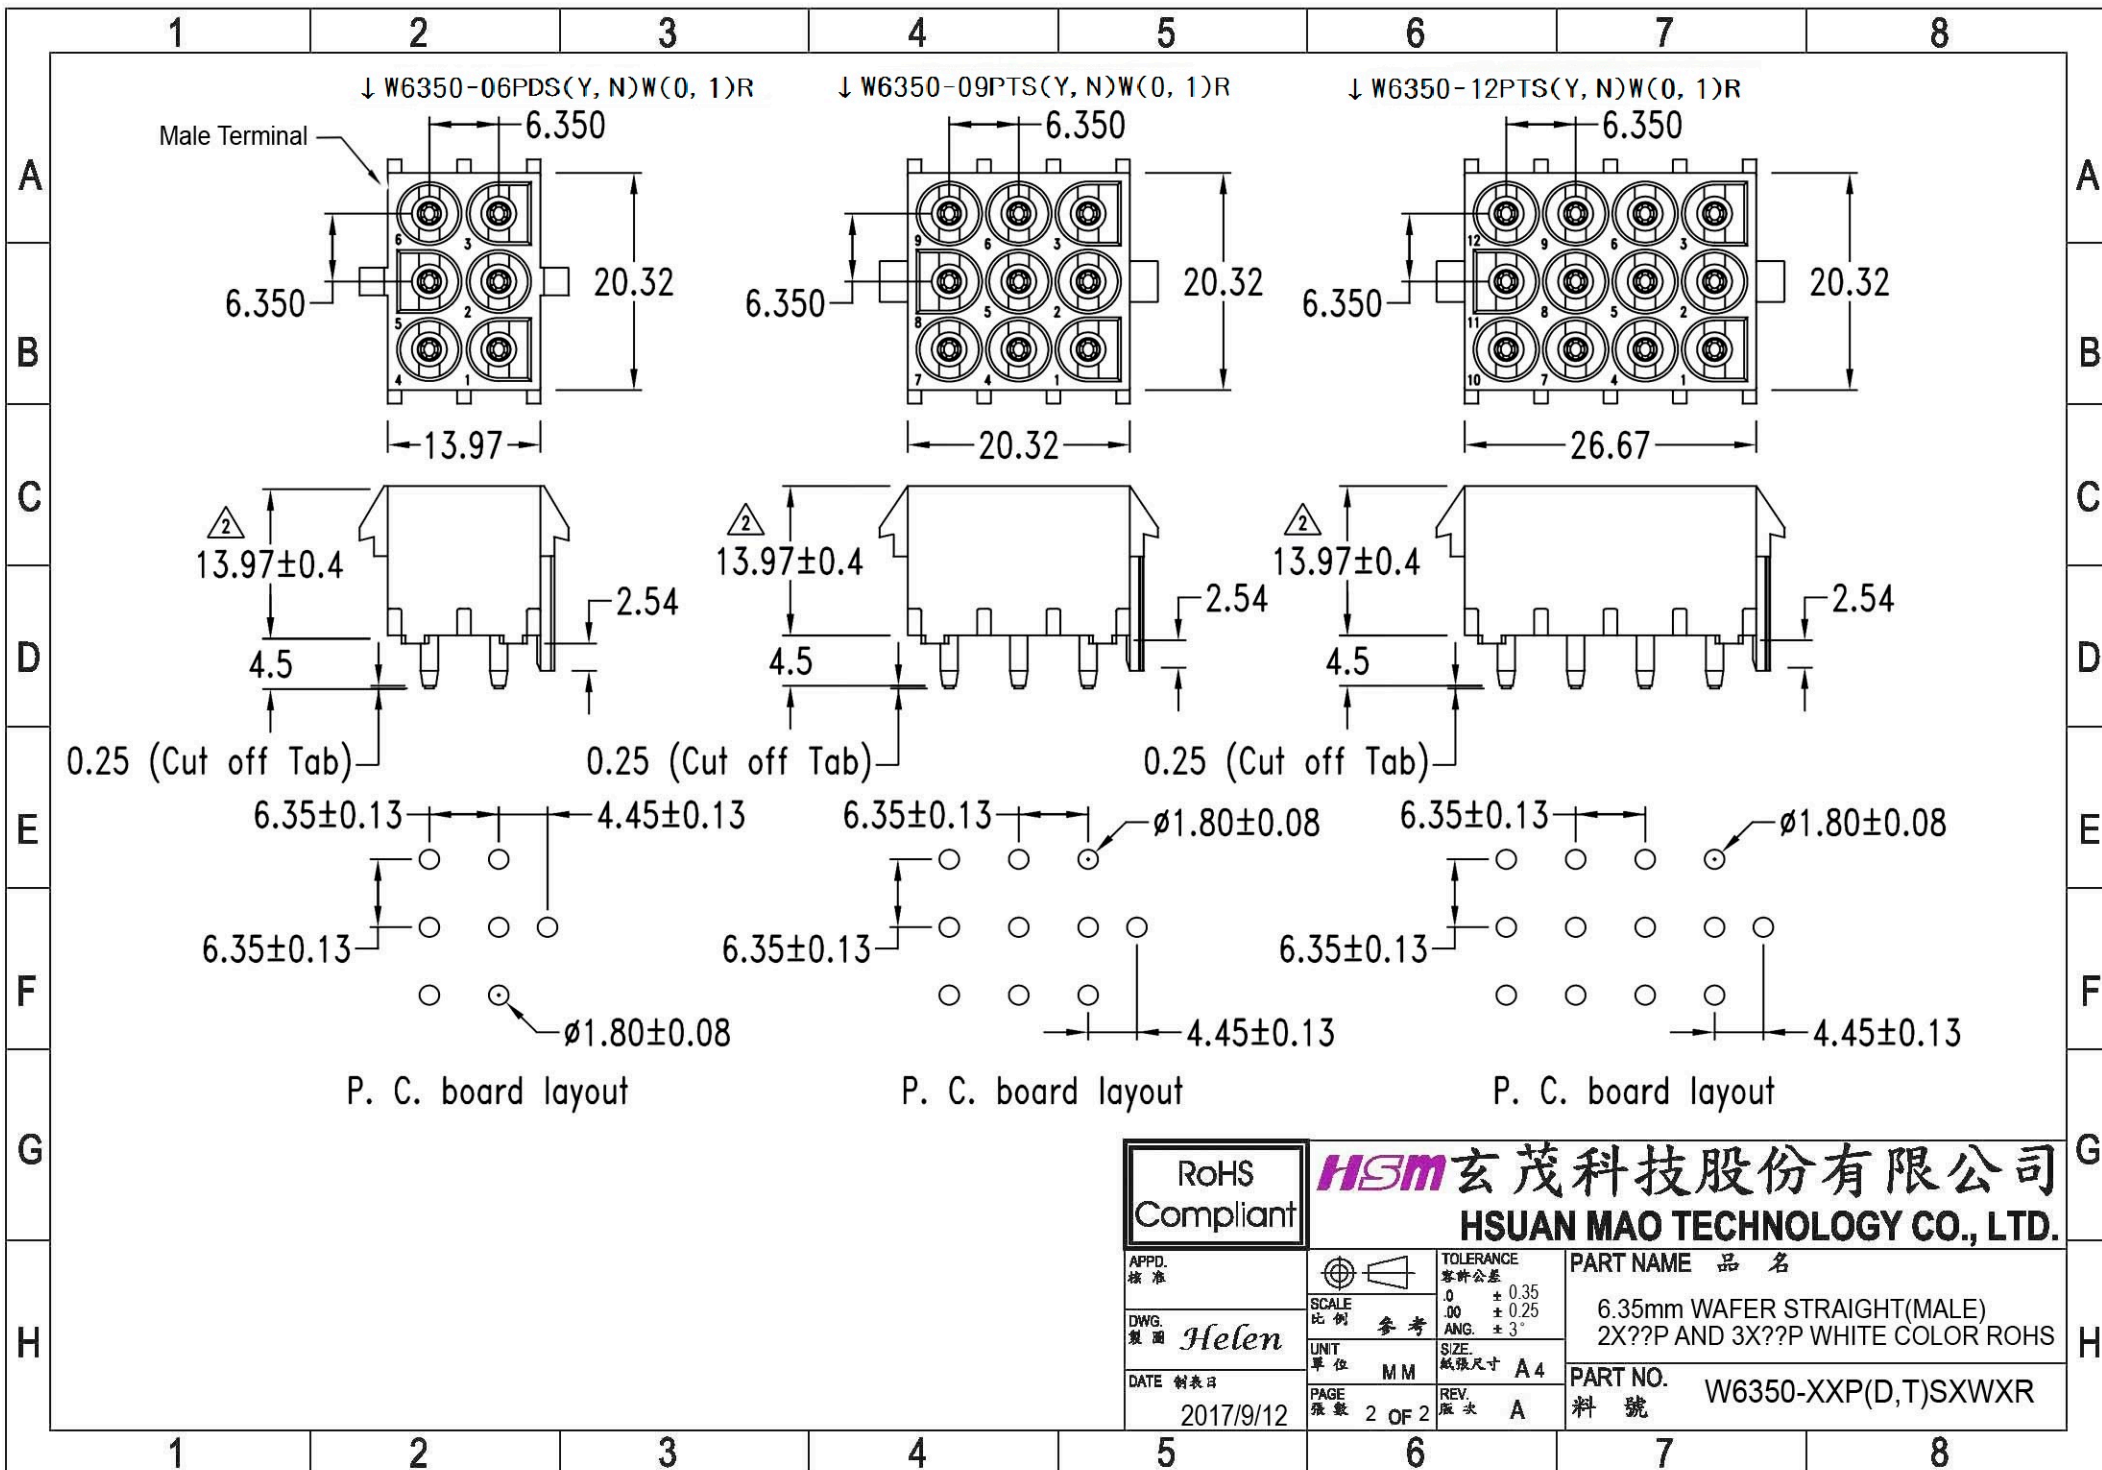

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
DWG.
製圖
DATE
制表日
2017/9/12

SCALE
比例
UNIT
單位
PAGE
張數
2 OF 2

TOLERANCE
容許公差
0 ± 0.35
.00 ± 0.25
ANG. ± 3°
SIZE.
紙張尺寸
A4
REV.
版本
A
PART NAME
品名
6.35mm WAFER STRAIGHT(MALE)
2X??P AND 3X??P WHITE COLOR ROHS
PART NO.
料號
W6350-XXP(D,T)SXWXR