

Features:


- 2 ~ 6 circuits available
- UL 94V-2 nylon 66
- .045"(1.14mm) square pin
- Tin-plated brass pins. Plating options available
- Polarization through varied center spacing between circuit 1 and 2
- UL file No.: E114003
- CSA file No.: LR86545

Specifications:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

| Circuits | Dim. A | Dim. B | Circuits | Dim. A | Dim. B |
|----------|--------|--------|----------|--------|--------|
| 2 | 7.5 | 12.5 | 5 | 22.5 | 27.5 |
| 3 | 12.5 | 17.5 | 6 | 27.5 | 32.5 |
| 4 | 17.5 | 22.5 | | | |

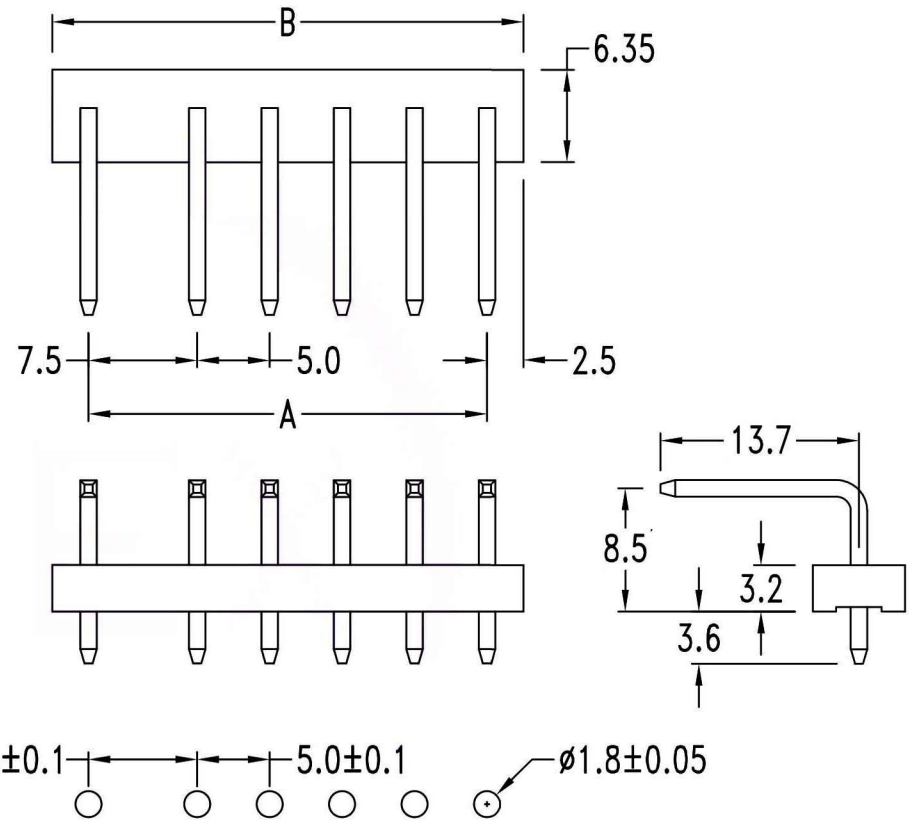

P. C. Board Hole Dimensions

| | | |
|---|--|------|
| RoHS Compliant | HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. | |
| | APPD. 核准 DWG. 製圖 DATE 制表日 2013/10/24 | Hedy |
| SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 / 1 | UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.08 (mm) .00 ± 0.25 (mm) 0 ± 0.40 (mm) SIZE. 紙張尺寸 A 4 REV. 版次 A | |