

Features:


- 2 ~ 6 circuits available
- UL 94V-2 nylon 66
- Polarization through varied center spacing between circuit 1 & 2
- .045"(1.14mm) square pin
- Tin-plated brass pins. Plating options available
- UL file No.: E114003
- CSA file No.: LR86545

Specifications:

- Current rating: 7A
- Voltage rating: 250V AC,DC
- Dielectric withstanding voltage: 1500V AC/minute
- Contact resistance: 20mΩ Max.
- Ambient temperature rise: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	7.5	12.5	5	22.5	27.5
3	12.5	17.5	6	27.5	32.5
4	17.5	22.5			

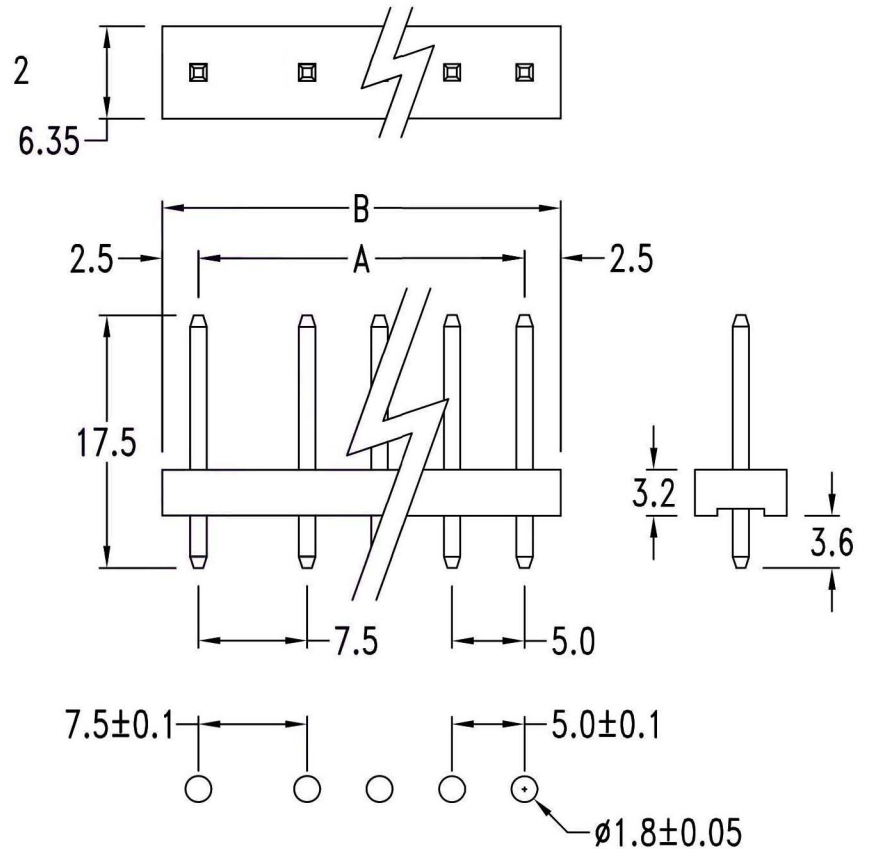

P. C. Board Hole Dimensions

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.05 (mm) .00 ± 0.15 (mm) .0 ± 0.25 (mm)	PART NAME 品名 7.5-5.0mm WAFER 1XXXP STRAIGHT TYPE WITHOUT BACK WHITE COLOR NYLON 66 UL94V-2 ROHS
DWG. 製圖	Hedy	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 / 1	PART NO. 料號 W7511-XXPSNATWR
DATE 制表日	2013/09/11	SIZE. 紙張尺寸 A 4 REV. 版次 A	