


NOTES:

- MATERIAL: C2680 HV160°
THICKNESS=0.20mm
- PLATING: Δ NICKEL ALL OVER. THICKNESS AT 50 μ "
 Δ GOLD FLASH OVER NICKEL. THICKNESS AT 0.9-1 μ "
- QUANTITY: 10,000PCS/REEL

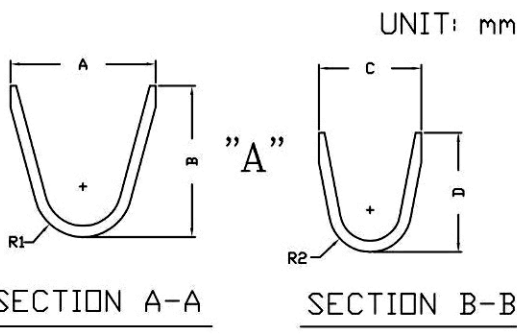

TYPE	G	K	N
A	2.640	2.140	2.100
B	2.700	2.260	1.960
C	1.860	1.750	1.670
D	2.130	1.540	1.380
R1	R0.90	R0.90	R0.75
R2	R0.75	R0.75	R0.75
AWG	20-22	24-26	28-30

C 0542 - T M S B G 0 0 0 R

1 2 3 4 5 6 7 8 9 10 11

- | | | | |
|--|--|---|---|
| 1. PRODUCTS:
C: Connector | 5. CONTACT PLATING:
S: Selective Gold
G: Gold Flash
A: Gold 5 μ "
B: Gold 10 μ "
C: Gold 15 μ "
D: Gold 30 μ " | 7. WIRE OPTION:
G: Suitable For
20-22 Awg
K: Suitable For
24-26 Awg
N: Suitable For
26-30 Awg | 8. FILL IT WITH "0"
9. FILL IT WITH "0"
10. FILL IT WITH "0"
11. R: ROHS |
| 2. SERIES NO.:
0542 | 6. CONTACT MATERIAL:
B: Brass (Male)
P: Phosphor Bronze
(Female) | | |
| 3. TYPE:
T: Terminal | | | |
| 4. CONTACT TYPE:
M: Male
F: Female | | | |

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 BETTY		TOLERANCE X ± 0.05 .XX ± 0.02 .XXX ± 0.002	PART NAME 品名 1.0mm D-SUB CRIMPING MALE TERMINAL SELECTIVE GOLD BRASS MATERIAL (1ROLL=10KPCS) ROHS
DWG. 製圖 KAREN		SCALE 比例 參考	
DATE 制表日 2015/01/20	UNIT 單位 MM	SIZE 線徑尺寸 A4	PART NO. 料號 C0542-TMSBX000R
	PAGE 張數 1 OF 1	REV. 版本 C	